

# Luminaire BEBRA




IP 68, 1m     for workpits: acid-, alkali- and fuel-resistant



## Luminaire BEBRA

**Housing:** duroplastic  
**Lamp cover:** PMMA transopal, impact resistant, with mirrorfinish internal reflector, medium beam, adjustable  
**Electronics:** low loss ballast, starter, trough-wiring 2 x 1,5 mm<sup>2</sup>, 2 cable glands M20  
**Mounting:** 2 reinforced plastic clamps  
**Gaskets:** silicone-/synthetic rubber, non-ageing, form-retaining, short sealing system

	L	Dimensions in mm			Weight approx. kg
		B	H	a	
18 W	782	107	142	395 ± 80	2,8
36 W	1392	107	142	1005 ± 80	3,5
58 W	1732	107	142	1305 ± 80	4,3

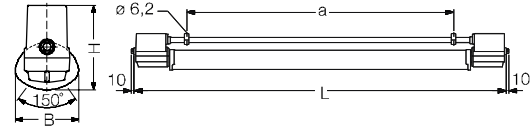

Version/Wattage		Order no.
<b>Luminaire BEBRA with reflector tube medium beam</b>		
<b>PMMA transopal, impact resistant – standard version –</b>		
<b>1 x 18</b>	ind.	<b>530 210</b>
	comp.	<b>530 220</b>
<b>1 x 36</b>	ind.	<b>530 410</b>
	comp.	<b>530 420</b>
<b>1 x 58</b>	ind.	<b>530 610</b>
	comp.	<b>530 620</b>
<b>Luminaire BEBRA with reflector tube</b>		
<b>PMMA clear, impact resistant</b>		
<b>1 x 18</b>	ind.	<b>530 211</b>
	comp.	<b>530 221</b>
<b>1 x 36</b>	ind.	<b>530 411</b>
	comp.	<b>530 421</b>
<b>1 x 58</b>	ind.	<b>530 611</b>
	comp.	<b>530 621</b>
<b>Luminaire BEBRA without reflector tube</b>		
<b>1 x 18</b>	ind.	<b>530 21V</b>
	comp.	<b>530 22V</b>
<b>1 x 36</b>	ind.	<b>530 41V</b>
	comp.	<b>530 42V</b>
<b>1 x 58</b>	ind.	<b>530 61V</b>
	comp.	<b>530 62V</b>
<b>Accessories and additional prices</b>		
<b>Reflector tube PMMA impact resistant</b>		
<b>– transopal</b>		
– 18		<b>200 852</b>
– 36		<b>200 854</b>
– 58		<b>200 856</b>
<b>– clear</b>		
– 18		<b>200 853</b>
– 36		<b>200 855</b>
– 58		<b>200 857</b>
<b>Reflector tube PMMA impact resistant</b>		
<b>with reflector turned by 180°</b>		
<b>– transopal</b>		
– 18		<b>201 852</b>
– 36		<b>201 854</b>
– 58		<b>201 856</b>
<b>– clear</b>		
– 18		<b>201 853</b>
– 36		<b>201 855</b>
– 58		<b>201 857</b>
<b>Trough-wiring 4 x 1,5 mm<sup>2</sup></b>		
– 18		<b>530 802</b>
– 36		<b>530 804</b>
– 58		<b>530 806</b>

Version/Wattage	Order no.
<b>NORKA safety starter</b> electronic	<b>200 91</b>
<b>Safety-/rapid starter</b> (DEOS)	<b>200 11</b>
<b>Mounting plates stainless steel (pair)</b> – To be ordered with luminaire	<b>530 001</b>
<b>Spare parts</b>	
<b>Pressure cap</b>	
– 18/36	<b>184 33</b>
– 58	<b>184 39</b>
<b>Cover plate on starter side</b>	
– 18/36	<b>117 64</b>
– 58	<b>117 65</b>
<b>Cover plate on side without starter</b>	
– 18/36	<b>117 62</b>
– 58	<b>117 63</b>
<b>Guiding piece</b>	
– with contact insert	<b>189 66</b>
– without contact insert	<b>189 41</b>
<b>Connecting board on starter side</b>	
– 18/36	<b>224 42</b>
– 58	<b>224 41</b>
<b>Connecting board on side without starter</b>	
– 18/36	<b>137 37</b>
– 58	<b>137 39</b>
<b>Contact insert</b>	<b>200 314</b>
<b>Silicone gasket</b>	<b>200 351</b>
<b>Stirrup clamp reinforced brown</b>	<b>200 211</b>
<b>Ballast</b>	
– 18	<b>202 0</b>
– 36	<b>204 0</b>
– 58	<b>206 5</b>

