

# NORKA Tubular luminaire Ø 60 mm BERN

IP 68, 20 m       resistant to pressurised water

available on request




## Tubular luminaire BERN

**Housing:** tube Ø 60 mm made of PMMA transopal impact-resistant or PC clear, with anodised internal aluminium reflector.

Quick-mounting end caps flush with polymer tube.

**Electronics:** electronic ballast (HF), cable gland M20

**Mounting:** 2 mounting clamps made of polymer/stainless steel

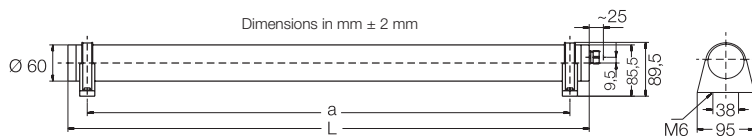

Version/Wattage	Lamp	Order no.	L mm	a± 50 mm
-----------------	------	-----------	------	----------

### Luminaire BERN with HF ballast

PC clear (fracture proof)

1 x 18	T8	534 27	1095	960
1 x 36	T8	534 47	1705	1570
1 x 58	T8	534 67	2005	1870
1 x 39	T5	534 37	1470	1335
1 x 54	T5	534 57	1770	1635
1 x 49	T5	534 77	2070	1935
1 x 80	T5	534 87	2070	1935
1 x 24	TC-L	534 07	790	655
1 x 36	TC-L	534 17	885	750
1 x 55	TC-L	534 97	1005	870

### Luminaire BERN with HF ballast, twin lamp

PC clear (fracture proof)

2 x 36	TC-L	534 15	1349	1215
2 x 55	TC-L	534 25	1788	1640

### Luminaire BERN SK I with HF ballast (protection class I)

PC clear (fracture proof)

1 x 14	T5	534 370	745	610
1 x 21	T5	534 270	1045	910
1 x 24	T5	534 170	745	610
1 x 28	T5	534 070	1345	1210
1 x 35	T5	534 470	1645	1510

### Luminaire BERN without ballast (for remote ballast)

PC clear (fracture proof)

1 x 18	T8	534 20	905	770
1 x 36	T8	534 40	1515	1380
1 x 58	T8	534 60	1815	1680

Other versions available on request

Version/Wattage	Lamp	Order no.	L mm	a± 50 mm
-----------------	------	-----------	------	----------

### Luminaire BERN with HF ballast

PMMA transopal

1 x 18	T8	536 27	1095	960
1 x 36	T8	536 47	1705	1570
1 x 58	T8	536 67	2005	1870
1 x 39	T5	536 37	1470	1335
1 x 54	T5	536 57	1770	1635
1 x 49	T5	536 77	2070	1935
1 x 80	T5	536 87	2070	1935
1 x 24	TC-L	536 07	790	655
1 x 36	TC-L	536 17	885	750
1 x 55	TC-L	536 97	1005	870

### Luminaire BERN with HF ballast, twin lamp

PMMA transopal

2 x 36	TC-L	536 15	1351	1215
2 x 55	TC-L	536 25	1780	1640

### Luminaire BERN SK I with HF ballast (protection class I)

PMMA transopal

1 x 14	T5	536 370	745	610
1 x 21	T5	536 270	1045	910
1 x 24	T5	536 170	745	610
1 x 28	T5	536 070	1345	1210
1 x 35	T5	536 470	1645	1510

### Luminaire BERN without ballast (for remote ballast)

PMMA transopal

1 x 18	T8	536 20	905	770
1 x 36	T8	536 40	1515	1380
1 x 58	T8	536 60	1815	1680

Other versions available on request



## Quick locking and connecting system:

①

After loosening of safety screw, fastening bail can be opened by using a small screw driver.

②

Pull off the cover from the housing and connect the lead wire to the plug. To close the luminaire reattach the cover and press down the fastening bail!

# Tubular luminaire Ø 60 mm **BERN**



IP 68, 20 m resistant to pressurised water

available on request

Version/Wattage

Order no.

## Accessories

### Low loss ballast (VVG)

in separate housing, IP 65, 230 V/50 Hz, protection class II

- 18	ind.	534 174
	comp.	534 177
- 36	ind.	534 175
	comp.	534 178
- 58	ind.	534 176
	comp.	534 179

### Mounting clamps transparent (pair)

- stainless steel V2A	534 208
- stainless steel V4A	534 118

### Version end caps transparent

534 001

### Version with transparent chassis (not available for TC-L lamps)

for 360° illumination

- clear	534 007
- blue	534 005
- red	534 006

### Version with light emitting slot e.g. 16 mm

534 003

### Version direct / indirect beam

534 004

### Through-wiring

- 2 x 1,5 mm <sup>2</sup>	length + 25 mm	534 69.
- 2 x 2,5 mm <sup>2</sup>	length + 25 mm	534 93.
- 4 x 1,5 mm <sup>2</sup>	length + 25 mm	534 80.
- 4 x 2,5 mm <sup>2</sup>	length + 25 mm	534 98.

### Wire rope mounting for wire Ø 4 - 10 mm

(pair) 534 102

### Wall mounting

with hook for safety wire 534 101

### Ground mounting pole stainless steel

(not for public areas) 534 100

### Suspension mounting 1m suspension

with stainless steel clamps 534 166

**NEW** items are marked yellow



Mounting clamps  
(standard with luminaire)



Mounting clamps  
transparent (additional charge)



Mounting clamps V4A  
(additional charge)  
Order no. 534 118




Special version  
with transparent end caps



Special version  
transparent, blue or red,  
360° all around light



Wire rope suspension

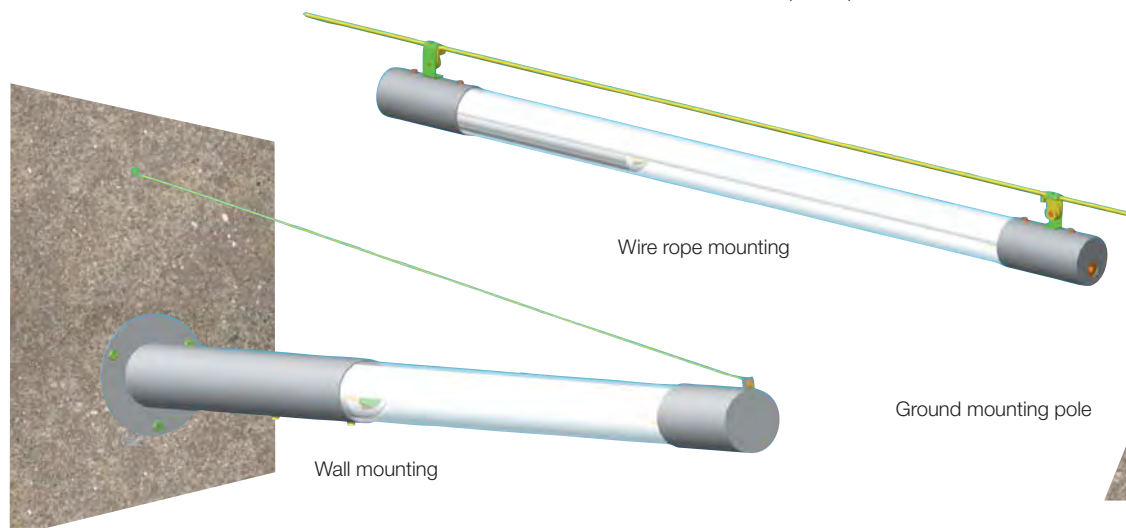

Wall mounting

Wire rope mounting

Ground mounting pole

# NORKA Tubular luminaire Ø 60 mm BERN

IP 68, 20 m       resistant to pressurised water

available on request




## Tubular luminaire BERN

**Housing:** tube Ø 60 mm made of PMMA transopal impact-resistant or PC clear, with anodised internal aluminium reflector.

Quick-mounting end caps flush with polymer tube.

**Electronics:** electronic ballast (HF), cable gland M20

**Mounting:** 2 mounting clamps made of polymer/stainless steel

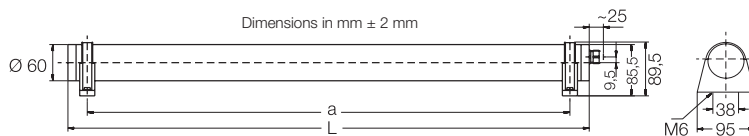

Version/Wattage	Lamp	Order no.	L mm	a ± 50 mm	Version/Wattage	Lamp	Order no.	L mm	a ± 50 mm
<b>Luminaire BERN with HF ballast DC</b>					<b>Luminaire BERN with HF ballast DC</b>				
<b>PC clear (fracture proof)</b>					<b>PMMA transopal</b>				
1 x 36	24 Volt T8	534 037	1705	1570	1 x 36	24 Volt T8	536 037	1705	1570
<b>Luminaire BERN "Solar" with HF ballast DC</b>					<b>Luminaire BERN "Solar" with HF ballast DC</b>				
<b>PC clear (fracture proof)</b>					<b>PMMA transopal</b>				
1 x 8	12 Volt T5	534 027	655	460	1 x 8	12 Volt T5	536 027	655	460
1 x 8	24 Volt T5	534 017	655	460	1 x 8	24 Volt T5	536 017	655	460
<b>Luminaire BERN LED "S"</b>					<b>Luminaire BERN LED "S"</b>				
<b>PC clear (fracture proof), with built-in transformer</b>					<b>PMMA transopal, with built-in transformer</b>				
2 x 1,2	LED blue	532 012	1600	1455	2 x 1,2	LED blue	533 012	1600	1455
<b>Luminaire BERN LED "Effect"</b>					<b>Luminaire BERN LED "Effect"</b>				
<b>PC clear (fracture proof), with built-in transformer</b>					<b>PMMA transopal, with built-in transformer</b>				
1 x 1,2	LED blue	532 011	350	220	1 x 1,2	LED blue	533 011	350	220
<b>Luminaire BERN LED "Star", protection class II</b>					<b>Luminaire BERN LED "Star", protection class II</b>				
<b>PC clear (fracture proof)</b>					<b>PMMA transopal</b>				
8 x 1,2	LED white	532 018	655	520	8 x 1,2	LED white	533 018	655	520
<b>Accessories</b>									
<b>Electronic transformer</b>					<b>Spare parts</b>				
IP 65, protection class II, 180 x 95 x 57mm					<b>Mounting clamps (pair)</b>				
for max. 7,2 W					- V4A				
737 180					- black version				
					534 118				
					- transparent version				
					534 218				
					- with hinge				
					534 208				
					- without cable gland				
					534 219				
					<b>End caps black</b>				
					- with cable gland M20				
					- with cable gland M20				
					569 61				
					- without cable gland				
					564 38				
					<b>End caps transparent</b>				
					- with cable gland M20				
					- with cable gland M20				
					569 65				
					- without cable gland M20				
					567 64				
					- without cable gland M20				
					569 63				

**NEW** items are marked yellow



# Tubular luminaire Ø 60 mm **BERN**

IP 68, 20 m       resistant to pressurised water  
available on request

**NORKA**

