




IP 65, IP 69K\*      IK 08, 650 °C  
**DB**-certified available on request



Single lamp polymer luminaire made of fibreglass reinforced polyester. With PMMA lamp diffuser, impact strengthened, transopal or clear, with internal mirror finish reflector, asymmetric beam.  
 With integrated low loss ballast and starter or electronic control gear.  
 Ready for connection through two M20 cable glands, through wiring 2 x 1.5 mm<sup>2</sup>.  
 Two stainless steel fixation plates.



-  Impact-resistant!
-  Fuel resistant!
-  Oil resistant!

FULDA T5/T8

**With PMMA lamp diffuser, impact strengthened, transopal**


1 x 21 W	T5	ECG	540 171
1 x 24 W	T5	ECG	540 170
1 x 28 W	T5	ECG	540 070
1 x 35 W	T5	ECG	540 175

**Lamp diffuser PMMA, impact strengthened**


1 x 39 W	T5	ECG	540 570
1 x 49 W	T5	ECG	540 970
1 x 54 W	T5	ECG	540 770
1 x 80 W	T5	ECG	540 870

**Lamp diffuser PMMA, impact strengthened**


	transopal	clear
24 W	207 963	207 863
21/39 W	207 961	207 861
28/54 W	207 967	207 867
35/49/80 W	207 968	207 868

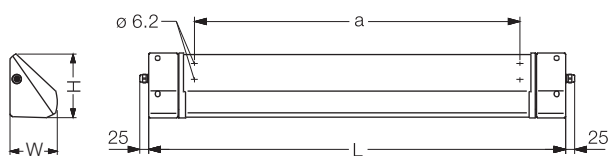


Version	Dimensions in mm ( $\pm 2$ mm)				Weight kg (approx.)
	L	W	H	a	
24 W	666	123	165	434 $\pm$ 4	2.2
21/39 W	966	123	165	734 $\pm$ 4	3.5
28/54 W	1266	123	165	1034 $\pm$ 4	4.0
35/49/80 W	1566	123	165	1334 $\pm$ 4	4.5
18 W	707	123	165	475 $\pm$ 4	2.4
36 W	1317	123	165	1085 $\pm$ 4	4.0
58 W	1617	123	165	1385 $\pm$ 4	5.3



1 x 54 W  
lamp diffuser PMMA,  
transopal,  
impact strengthened,  
asymmetric beam



1 x 36 W  
lamp diffuser PMMA,  
clear,  
impact strengthened,  
asymmetric beam

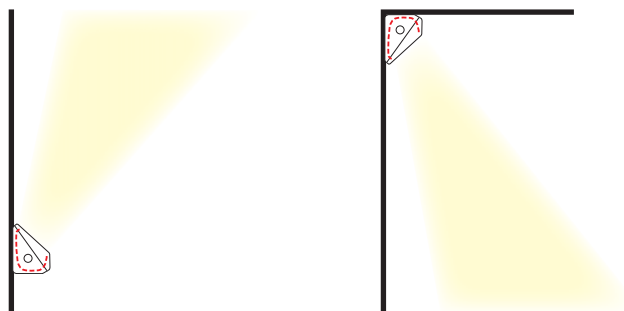

FULDA luminaire with upward beam,  
for work pits, etc.

FULDA luminaire in  
pedestrian underpasses



Perforated reflector for floor  
or ceiling uplighting



**Anti-graffiti coating** (available on request)  
special lamp diffuser coating for easy cleaning of paint  
and other pollution with conventional graffiti removers



Lamp diffuser PMMA, impact strengthened  
transopal or clear

**with lamp diffuser  
PMMA, impact strengthened, transopal**

1 x 18 W	T8 comp.	540 220	1 x 58 W	T8 comp.	540 620
	T8 ECG	540 270		T8 ECG	540 670
1 x 36 W	T8 comp.	540 420			
	T8 ECG	540 470			

**Lamp diffuser PMMA, impact strengthened  
transopal clear**

18 W	207 962	207 862
36 W	207 964	207 864
58 W	207 966	207 866