




Luminaire LUZERN

LUZERN 38 LED IP 65   

LUZERN 38 T 5 IP 65   

LUZERN 16 LED IP 65   




Tubular luminaire LUZERN

Protection class: I

Housing: tube Ø 38 mm or Ø 16 mm, PC (fracture proof) clear, inside ribbed or PMMA transopal

Electronics: LUZERN 38 T5 with electronic ballast, LUZERN 38 and 16 LED, remote supply via electronic transformer in separate housing, max. 20 W

Mounting: 2 mounting clamps

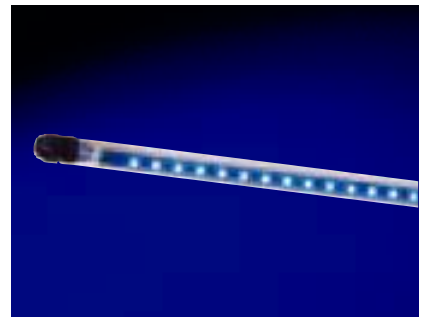

Version/Wattage

Order no.

Luminaire LUZERN 38 with electronic ballast PC clear (fracture proof), inside ribbed

1 x 14	T 5	HF	537 07
1 x 21	T 5	HF	537 17
1 x 24	T 5	HF	537 27
1 x 28	T 5	HF	537 37
1 x 35	T 5	HF	537 47

Luminaire LUZERN 38 with electronic ballast PMMA transopal, impact strengthened

1 x 14	T 5	HF	538 07
1 x 21	T 5	HF	538 17
1 x 24	T 5	HF	538 27

Luminaire LUZERN 38 with LED 24 V PC clear (fracture proof), inside ribbed

30 LED	white	537 613
60 LED	white	537 616
100 LED	white	537 620
150 LED	white	537 625

Luminaire LUZERN 38 with LED-NT 230 V, built-in electronic transformer, PC clear (fracture proof), inside ribbed

60 LED	white	537 656
--------	-------	---------

Luminaire LUZERN 38 with LED-triangle profile, NT 230 V, built-in electronic transformer,

3 x 20 LED	white	537 663
------------	-------	---------

Luminaire LUZERN 16 with LED 24 V PMMA clear, with 5m connecting cable

30 LED	white	537 513
60 LED	white	537 516
100 LED	white	537 520

Please indicate requested LED colour with order
– white, yellow, blue, green or red


Other LED versions

max. supply length approx. 2.000 mm **on request**

Accessories

Electronic transformer installed in housing IP 65, protection class II, max. 20 W, supply voltage 24 V DC, primary voltage 230-240V, 0/50/60 Hz

537 181

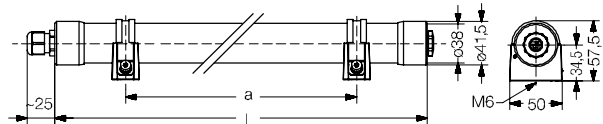

Version/Wattage

L


mm

a

mm

LUZERN 38 T5

1 x 14	965	850 ± 25
1 x 21	1265	1150 ± 25
1 x 24	965	850 ± 25
1 x 28	1735	1620 ± 25
1 x 35	2035	1920 ± 25

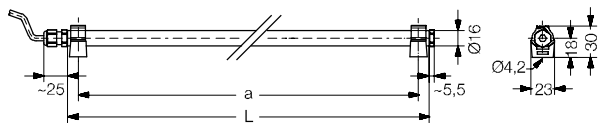

Version/Wattage

L

mm

a

mm

LUZERN 38 LED

3 x 20 LED	510	395 ± 25
30 LED	550	435 ± 25
60 LED	970	855 ± 25
100 LED	1530	1415 ± 25
150 LED	2230	2115 ± 25

LUZERN 16 LED

30 LED	470	355 ± 25
60 LED	890	775 ± 25
100 LED	1450	1335 ± 25

LED capacity

	white/yellow	blue/red/green
30 LED	2,88 W	3,6 W
60 LED	5,76 W	7,2 W
100 LED	9,60 W	12,0 W
150 LED	14,40 W	18,0 W