


NORKA Luminaire POLLUX

IP 65    CE protection class I  ball impact resistant, one-piece diecasted aluminium body



Low bay luminaire POLLUX

Housing: diecasted aluminium, satinised.
Frameless, hingeable safety cover glass. Internal aluminium reflector, wide beam, medium beam, narrow beam or intensive beam
Electronics: ballast with termoswitch, integrated ignitor with automatic cut-off. 2 cable entries M20 and internal terminals
Mounting: 2 bolts M10 for suspension or ceiling mounting
Gaskets: silicone-/synthetic rubber

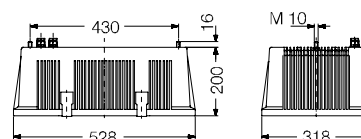

Version	Wattage	Order no.	Weight approx. kg	Version	Wattage	Order no.	Weight approx. kg		
Luminaire POLLUX – standard version – 2 bolts M10 for suspension or ceiling mounting, inductive				– intensive beam with secondary reflector system					
– wide beam				Lamp holder E 40	HIT	250	985 909	16	
Lamp holder E 40	HME	250	985 111	16	HST	250	985 913	16	
	HME	400	985 120	16	Lamp holder Fc2	HIT-DE	250	985 910	16
	HIE	250	985 108	16	– asymmetric beam at right angles (only available with swivel bracket 982 107)				
	HIE ²⁾	400	985 115	16	Lamp holder E 40	HIT	250	985 709	16
	HIE ²⁾	400 HS-ballast	985 125	17		HIT	400	985 716	16
	HSE	250	985 112	16		HIT ¹⁾	400 HS-VG	985 717	17
	HSE	400	985 122	17		HST	250	985 713	16
	HIT	250	985 109	16		HST	400	985 723	17
	HIT	400	985 116	16	– asymmetric beam lengthwise				
	HIT ¹⁾	400 HS-ballast	985 117	17	Lamp holder Fc2	HIT-DE	250	985 810	16
	HST	250	985 113	16		HIT-DE	400	985 818	16
	HST	400	985 123	17		HIT-DE ¹⁾	400 HS-VG	985 819	17
– intensive beam						HST-DE	250	985 814	16
Lamp holder E 40	HIT	250	985 309	16		HST-DE	400	985 824	17
	HIT	400	985 316	16	– extra narrow beam				
	HIT ¹⁾	400 HS-ballast	985 317	17	Lamp holder E 40	HIT	250	985 609	16
	HST	250	985 313	16		HIT	400	985 616	16
	HST	400	985 323	17		HIT ¹⁾	400 HS-VG	985 617	17
Lamp holder Fc2	HIT-DE	250	985 310	16		HST	150	985 605	16
	HIT-DE	400	985 318	17		HST	250	985 613	16
	HIT-DE ¹⁾	400 HS-ballast	985 319	17		HST	400	985 623	17
	HST-DE	250	985 314	16	Accessories				
	HST-DE	400	985 324	17	Compensation				
Lamp holder BY22d	LST	35	985 301	16	1 x HI/HS	150	982 085		
	2 x LST	35	985 345	17	1 x HM	250	982 063		
supplied c/w ENDURA-lamp and electronic ballast					1 x HM	400	982 064		
	100		985 366	15	1 x HI/HS	250	982 067		
– intensive beam					1 x HI	400	982 068		
Lamp holder E 40	HIT	250	985 209	16	1 x HS	400	982 070		
	HIT	400	985 216	16	Stainless steel hanger for rope and ceiling hooks (pair) 982 108				
	HIT ¹⁾	400 HS-ballast	985 217	17	Ceiling plates for surface mounting (pair) 982 109				
	HST	250	985 213	16	Pole extension piece for swivel stirrup for spigot diameter				
	HST	400	985 223	17	of 70 - 76 mm	982 125			
Lamp holder Fc2	HIT-DE	250	985 210	16	of 89 -108 mm	982 126			
	HIT-DE	400	985 218	16					
	HIT-DE ¹⁾	400 HS-ballast	985 219	17					

¹⁾ Optimum operation on HS-ballast with OSRAM-lamp

²⁾ Only for OSRAM HQI-E 400 W-D


 ball impact resistant version available (see accessories)

Due to the starting current of high-pressure discharge lamps, the electric circuits of the luminaire must be protected by fuses designed for twice the nominal current of the lamp.

Luminaire POLLUX




IP 65 protection class I * ball impact resistant, one-piece die-cast aluminium body

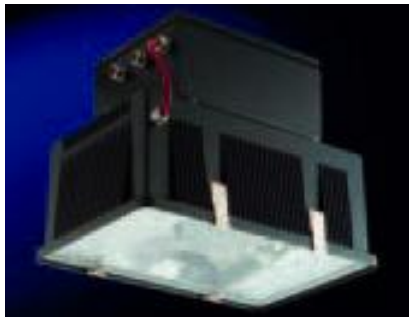

Low bay luminaire POLLUX 044 – inductive –

for two high pressure discharge lamps,
medium beam,
colour finish RAL 7021

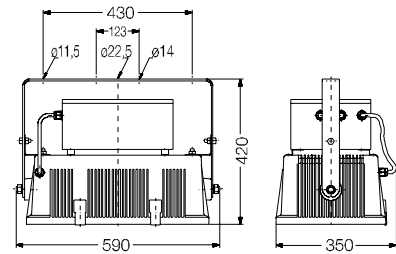

Version with accessories 982 112

Version	Wattage	Order no.	Weight approx. kg
Luminaire POLLUX 044 – inductive – medium beam			
Lamp holder E 40			
2 x HIT	250	985 334	23
ea. 1 x HIT	250 / HIT 400	985 335	25
ea. 1 x HIT	250 / HST 250	985 336	23
2 x HST	250	985 338	23
ea. 1 x HST	250 / HIT 400	985 339	25
2 x HIT	400	985 340	25
ea. 1 x HIT	400 / HST 400	985 341	27
2 x HST	400	985 344	28
2 x HIT	400 ¹⁾ HS-ballast	985 353	28
ea. 1 x HIT	400 ¹⁾ HS-ballast / HST 400	985 354	28
other versions on request			
Compensation			
2 x HI	250 W	982 211	
1 x HI	250 W / 1 x HI 400 W	982 212	
1 x HI	250 W / 1 x HS 250 W	982 211	
2 x HS	250 W	982 211	
1 x HS	250 W / 1 x HI 400 W	982 212	
2 x HI	400 W	982 213	
1 x HI	400 W / 1 x HS 400 W	982 214	
2 x HS	400 W	982 215	
2 x HI	400 W at HS-ballast	982 215	
1 x HI	400 W at HS-ballast/1 x HS 400 W	982 215	

¹⁾ Optimum operation with HS-ballast and OSRAM lamps

Version	Order no.
Accessories	

To be ordered with luminaire:

Ball impact resistant version with bracket for POLLUX 044	982 112
Wire protection screen	982 106
Strengthened cover glass	982 102
Lamp holder for multi-purpose lamp E 27 (must be switched in interlocked state above 60 W) for clear lamps only, max. QT 32, 250 W	982 113
Lamp holder for emergency light E 27 for clear lamps only, max. QT 32, 60 W	982 114
Colour finish according to RAL	982 260
Spare parts see page 110 - 111	



* ball impact resistant version available (see accessories)

"Due to the starting current of high-pressure discharge lamps, the electric circuits of the luminaire must be protected by fuses designed for twice the nominal current of the lamp."