

# NORKA Luminaire SATURN single lamp

IP 54  with adjustable reflector housing



## Floodlight SATURN


**Housing:** thermoplast PBT, heat resistant, anthracite, reflector housing can be swivelled and locked. Internal aluminium reflector, asymmetric beam, hinged frame with safety glass. Two housing sizes

**Electronics:** ballast with thermoswitch and ignitor with automatic cut-off


**Mounting:** aluminium clamp

**Gaskets:** silicone-/synthetic rubber, non-ageing, form retaining

Version	Wattage	Oder no.	Weight approx. kg	Order no.
<b>Luminaire SATURN anthracite, standard version – inductive –</b>				
Lamp holder R7s				
HIT-DE/HST-DE	70	<b>950 700</b>	4,9	
	150	<b>950 701</b>	6,2	
QT-DE R7s-15	250 max.	<b>950 720</b>	4,0	
<b>Luminaire SATURN anthracite, with large side covers – inductive –</b>				
Lamp holder Fc 2				
HIT-DE*	250	<b>950 703</b>	7,7	
* not for 250 W HST-DE lamps				
<b>Luminaire SATURN anthracite, for compact fluorescent lamp</b>				
Lamp holder Gx24 q3				
TC-TEL	32 HF	<b>950 710</b>	5,2	
TC-TEL	26 HF	<b>50 713</b>	5,2	
Lamp holder Gx24 q4				
TC-TEL	42 HF	<b>950 711</b>	5,2	
Lamp holder G 24 d-3				
TC-D	26 ind.	<b>950 712</b>		
<b>Spare parts see page 110 - 111</b>				
<b>Accessories</b>				
▽▽-version max. 70 W				<b>950 16</b>
<b>White colour finish</b>				<b>950 962</b>
<b>Colour finish according to RAL</b>				<b>950 961</b>
<b>Cross louvre</b>				<b>950 976</b>
<b>Additional lamp holder for instant light R7s-15</b>				
QT-DE max. 200 W, floodlight with large side covers, cut-off unit to be provided by customer, for 70 and 150 W only				<b>950 946</b>
<b>Built-in delayed-action automatic cut-off unit</b>				
(bridging lamp max. 200 W QT-DE), ignitor without automatic cut-off, for 70/150 W HIT-DE only				<b>900 997</b>
<b>Built-in automatic cut-off relay</b>				
(lamp max. 200 W QT-DE) for 70/150 W HIT-DE only				<b>900 928</b>
<b>Pole bracket anodised aluminium, black</b> (for one luminaire)				<b>950 905</b>
<b>Mounting clamp anodised</b>				<b>950 948</b>
<b>Cover glass with ornament</b>				<b>950 977</b>
<b>UV-filter</b>				<b>950 979</b>
<b>Bracket for panel-ceiling mounting</b> for max. 250 W versions				<b>950 944</b>
<b>Bracket for pole mounting stainless steel</b> spigot Ø 76 mm				<b>950 971</b>
<b>Compensation</b>				
HI/HS	35	<b>900 988</b>		
HI/HS	70	<b>900 984</b>		
HI/HS	150	<b>900 985</b>		
HI	250	<b>900 967</b>		
<b>Through-wiring</b>				
– 2 x 1,5 mm <sup>2</sup>				<b>950 801</b>
– 4 x 1,5 mm <sup>2</sup>				<b>950 802</b>
– 4 x 2,5 mm <sup>2</sup>				<b>950 820</b>

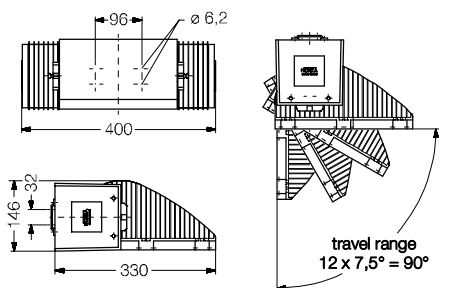

### Luminaire SATURN with large side covers



# Luminaire SATURN single and twin lamp



IP 54 with adjustable reflector housing, wide beam



## Floodlight SATURN

**Housing:** thermoplast PBT, heat resistant, anthracite, reflector housing can be swivelled and locked. Internal aluminium reflector, wide beam, hinged frame with safety glass

**Electronics:** ballast with thermoswitch, ignitor with automatic cut-off.

**Mounting:** aluminium clamp

**Gaskets:** silicone-/synthetic rubber, non-ageing, form retaining

Version	Wattage	Oder no.	Weight approx. kg
<b>Luminaire SATURN anthracite, standard version – inductive –</b>			
Lamp holder G 12			
1 x HIT	35	<b>950 730</b>	4,6
2 x HIT	35	<b>950 731</b>	5,5
1 x HIT	70	<b>950 735</b>	4,9
2 x HIT	70	<b>950 736</b>	6,4

Spare parts see page 110 - 111



**Bracket for pole mounting**  
for 1 up to 4 luminaires

