

NORKA Luminaire SIRIUS

IP 54  with adjustable reflector housing



Compact floodlight SIRIUS

Housing: thermoplast PBT, heat resistant, anthracite, reflector housing can be swivelled and locked. Internal aluminium reflector, medium beam, hinged frame with safety glass. Two housing sizes

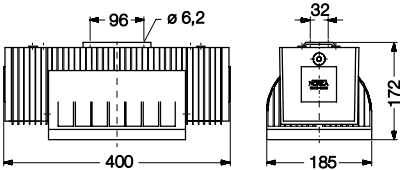
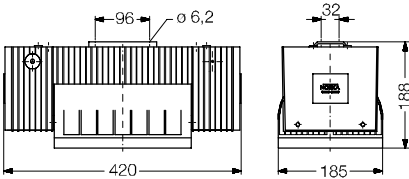
Electronics: ballast with thermoswitch and ignitor with automatic cut-off

Mounting: aluminium clamp

Gaskets: silicone-/synthetic rubber, non-ageing, form retaining




Luminaire SIRIUS
with adjustable reflector housing 120°

Version	Wattage	Order no.	Weight approx. kg	Version	Wattage	Order no.	Weight approx. kg
Luminaire SIRIUS anthracite, standard version – inductive –				Luminaire SIRIUS anthracite, with large side housings – inductive –			
– intensive beam				– intensive beam			
Lamp holder E 27	HME 50*/80	950 205	4,0	Lamp holder Fc 2	HIT-DE* 250	950 485	7,5
	HME 80*/125	950 208	4,0				
	HSE 50**	950 255	4,5	– wide beam			
	HSE 70**	950 257	4,5	Lamp holder Fc 2	HIT-DE* 250	950 486	7,5
				* not for HST-DE-lamps			
Lamp holder R 7s	HIT-DE/HST-DE			– intensive beam			
	70	950 107	4,3	Gx 24q2	TC-TEL 18	950 018	4,0
	HIT-DE/HST-DE			Gx 24q3	TC-TEL 32	950 030	4,0
	150	950 150	5,6	Gx 24q4	TC-TEL 42	950 042	4,0
Lamp holder G 12	HIT 70	950 170	4,3				
	HIT 150	950 115	5,6				
– narrow beam				Compensation			
Lamp holder R 7s	HIT-DE/HST-DE				HME 50	900 980	
	70	950 370	4,3		HME 80	900 981	
	HIT-DE/HST-DE				HME 125	900 982	
	150	950 315	5,6		HS 50	900 983	
Lamp holder E 27	HST 70	950 277	4,3		HI/HS 70	900 984	
					HI/HS 150	900 985	
					HI 250	900 967	
– narrow beam							
Lamp holder R 7s	HIT-DE/HST-DE			standard version			
	70	950 307	4,3				
	HIT-DE/HST-DE						
	150	950 450	5,6	with large side covers			
– extreme wide beam							
Lamp holder E 27	HST 70	950 070	4,3				
	HME 80*/125	950 080	4,0				
Lamp holder R 7s	HIT-DE/HST-DE						
	70	950 480	4,3				
	HIT-DE/HST-DE						
	150	950 482	5,6				
Lamp holder G 12	HIT 150	950 250	5,6				
– intensive beam with secondary-reflector-system							
Lamp holder R 7s	HIT-DE/HST-DE						
	70	950 108	4,3				
	150	950 151	5,6				
– intensive beam for halogen incandescent lamps							
Lamp holder E 27	QT-E 27150/250	950 025	3,5				
Lamp holder R 7s-15	QT-DE 200/300	950 020	3,5				

* factory setting
** with built-in ignitor

"Due to the starting current of high-pressure discharge lamps, the electric circuits of the luminaire must be protected by fuses designed for twice the nominal current of the lamp."

Luminaire SIRIUS

IP 54  with adjustable reflector housing



Version

Order no.

Accessories and additional prices

Eye bolts M6 (pair) galvanised steel for suspension	950 901
Prismatic cover glass	950 902
Ground spike , black, anodised aluminium 35 cm above ground	950 903
Ground spike , black, anodised aluminium 100 cm above ground	950 904
Pole bracket , black, anodised aluminium	950 905
Angle bracket , black, anodised aluminium	950 906
Internal louvre , anodised aluminium max. 150 W (13 x 13)	950 911
Shutter three-sided, with leaves at right angles to the lamp black, varnished aluminium	950 912
Shutter three-sided, with leaves parallel to the lamp black, varnished aluminium	950 917
Shutter three-sided, black, varnished aluminium	950 921
Shutter four-sided, black, varnished aluminium	950 913
Universal suspension for panelled ceilings up to 250 W	950 915
UV filter	950 918
Safety guard , galvanised steel	950 919
Wall bracket stainless steel, approx. 1 m	950 922
Pole bracket stainless steel, approx. 1 m with pole clip up to 2 1/2"	950 923
Blade louvre , anodised aluminium	950 931
Mounting clamp anodised	950 948
Version with white finish	950 960
Colour finish according to RAL	950 961
Pole bracket , stainless steel, for 1 - 4 luminaires spigot-Ø 76 mm	950 971
Cold resistant version -30°C	950 991
▽▽-version max. 150 W (only for HI/HS-lamps)	950 16
Through-wiring with 2 membrane gaskets	
- 2 x 1,5 mm ²	950 801
- 4 x 1,5 mm ²	950 802
- 4 x 2,5 mm ²	950 820

