

NORKA Luminaire TURKU ✨ ✨ single and twin lamp

IP 65     low temperature resistant down to -25°C



Luminaire TURKU single and twin lamp

Housing: glass fibre reinforced polyester, lamp holders thermoplastic PBT, pressure type and caps with knurled screw
Lamp cover: NORKA-DUPLEX-cold protection system, PMMA, medium beam
Electronics: built-in low loss ballast and starter or electronic starter, cold resistant, through-wiring 2 x 1,5 mm²
Mounting: 2 stainless steel mounting clamps
Gaskets: silicone-/synthetic rubber, non-ageing, form retaining, short sealing system




Version/Wattage		Order no.
Luminaire TURKU single lamp		
with NORKA-DUPLEX-cold protection system, PMMA medium beam – standard version –		
1 x 18	ind.	430 210
	comp.	430 220
	HF	430 270
1 x 36	ind.	430 410
	comp.	430 420
	HF	430 470
1 x 58	ind.	430 610
	comp.	430 620
	HF	430 670
Luminaire TURKU single lamp		
without NORKA-DUPLEX-cold protection system (only for operation with lamp cover)		
1 x 18	ind.	430 21V
	comp.	430 22V
	HF	430 27V
1 x 36	ind.	430 41V
	comp.	430 42V
	HF	430 47V
1 x 58	ind.	430 61V
	comp.	430 62V
	HF	430 67V

Accessories and additional prices

NORKA-DUPLEX-cold protection system	
PMMA medium beam	
- 18	215 132
- 36	215 134
- 58	215 136
- PMMA narrow beam	
- 18	215 122
- 36	215 124
- 58	215 126
Through-wiring, cold-resistant 4 x 1,5 mm²	
- 36	430 894
- 58	430 896
Continuous row connector, cold-resistant, single lamp	
- 4 x 1,5 mm ²	200 418
Wire suspension for 1m suspension (pair)	200 278
Quick-mounting clamps (pair)	202 220
Plug-in connector cold-resistant IP 65 (Luminaire without through-wiring)	202 221

Version/Wattage	Order no.
Spare parts	
Face piece with contact insert	181 44
Pressure cap with knurled screw	183 63
Starter	141 70
Guiding piece without contact insert	189 44
Holding frame	201 95
Contact insert	200 316
Starter socket	118 77
Knurled screw	325 56
Silicone sealing ring	200 352
Ballast	
- 18	212 00
- 36	214 00
- 58	216 50
Mounting clamp	200 222
Quick-mounting clamps	202 220
Plug-in connector	202 221

Luminous flux characteristics of the TURKU luminaire with standard fluorescent lamps Ø 26 mm

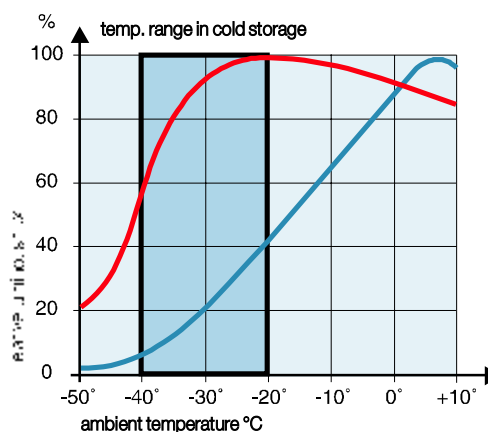

— NORKA luminaire TURKU with low loss ballast
 — ordinary luminaire with diffuser

