






# NORKA Tubular luminaire Ø 75 mm ZUG

IP 68, 20 m       resistant to pressurised water for T8 and T5 lamps

 applied  available on request




## Tubular luminaire ZUG

**Housing:** tube Ø 75 mm made of PMMA transopal impact-resistant or PC clear, with anodised internal aluminium reflector.

Quick-mounting end caps flush with polymer tube.

**Electronics:** electronic ballast (HF) or low loss ballast and starter, 1 cable gland M20.

**Mounting:** 2 mounting clamps made of polymer/stainless steel.

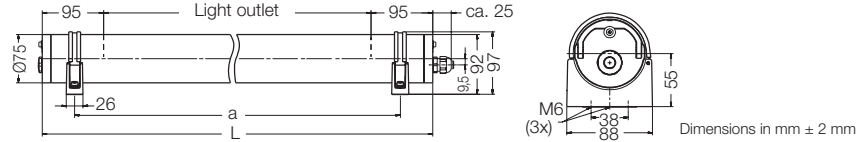

Version/Wattage	Lamp	L mm	a ± 25 mm	Weight approx. kg	Order no.
<b>Luminaire ZUG</b>					
<b>- PC clear (fracture proof)</b>					
<b>1 x 18</b>	T8 ind.	800	700	2,7	<b>770 21</b>
	T8 comp.	800	700	2,8	<b>770 22</b>
	T8 HF	800	700	2,3	<b>770 27</b>
<b>1 x 36</b>	T8 ind.	1410	1310	3,9	<b>770 41</b>
	T8 comp.	1410	1310	4,0	<b>770 42</b>
	T8 HF	1410	1310	3,4	<b>770 47</b>
<b>1 x 58</b>	T8 ind.	1710	1610	4,9	<b>770 61</b>
	T8 comp.	1710	1610	5,0	<b>770 62</b>
	T8 HF	1710	1610	4,0	<b>770 67</b>
<b>1 x 39</b>	T5 HF	1060	960	2,8	<b>770 37</b>
	T5 HF	1660	1560	4,0	<b>770 77</b>
	T5 HF	1360	1260	3,3	<b>770 57</b>
<b>1 x 80</b>	T5 HF	1660	1560	4,0	<b>770 97</b>
<b>- PMMA clear</b>					
<b>1 x 18</b>	T8 ind.	800	700	2,7	<b>771 21</b>
	T8 comp.	800	700	2,8	<b>771 22</b>
	T8 HF	800	700	2,3	<b>771 27</b>
<b>1 x 36</b>	T8 ind.	1410	1310	3,9	<b>771 41</b>
	T8 comp.	1410	1310	4,0	<b>771 42</b>
	T8 HF	1410	1310	3,4	<b>771 47</b>
<b>1 x 58</b>	T8 ind.	1710	1610	4,9	<b>771 61</b>
	T8 comp.	1710	1610	5,0	<b>771 62</b>
	T8 HF	1710	1610	4,0	<b>771 67</b>
<b>1 x 39</b>	T5 HF	1060	960	2,8	<b>771 37</b>
	T5 HF	1660	1560	4,0	<b>771 77</b>
	T5 HF	1360	1260	3,3	<b>771 57</b>
<b>1 x 80</b>	T5 HF	1660	1560	4,0	<b>771 97</b>
<b>- PMMA transopal</b>					
<b>1 x 18</b>	T8 ind.	800	700	2,7	<b>772 21</b>
	T8 comp.	800	700	2,8	<b>772 22</b>
	T8 HF	800	700	2,3	<b>772 27</b>
<b>1 x 36</b>	T8 ind.	1410	1310	3,9	<b>772 41</b>
	T8 comp.	1410	1310	4,0	<b>772 42</b>
	T8 HF	1410	1310	3,4	<b>772 47</b>
<b>1 x 58</b>	T8 ind.	1710	1610	4,9	<b>772 61</b>
	T8 comp.	1710	1610	5,0	<b>772 62</b>
	T8 HF	1710	1610	4,0	<b>772 67</b>
<b>1 x 39</b>	T5 HF	1060	960	2,8	<b>772 37</b>
	T5 HF	1660	1560	4,0	<b>772 77</b>
	T5 HF	1360	1260	3,3	<b>772 57</b>
<b>1 x 80</b>	T5 HF	1660	1560	4,0	<b>772 97</b>


## Accessories

**Mounting clamps**  
transparent with stainless steel **770 208**


**Through-wiring**

- 2 x 1,5 mm<sup>2</sup> length + 25 mm **770 69.**
- 2 x 2,5 mm<sup>2</sup> length + 25 mm **770 93.**
- 4 x 1,5 mm<sup>2</sup> length + 25 mm **770 80.**
- 4 x 2,5 mm<sup>2</sup> length + 25 mm **770 98.**
- 5 x 2,5 mm<sup>2</sup> length + 25 mm **770 39.**

**Wire rope suspension** for 1m suspension  
with stainless steel clamps **770 166**

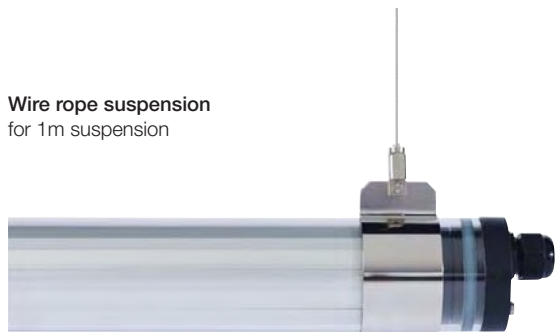



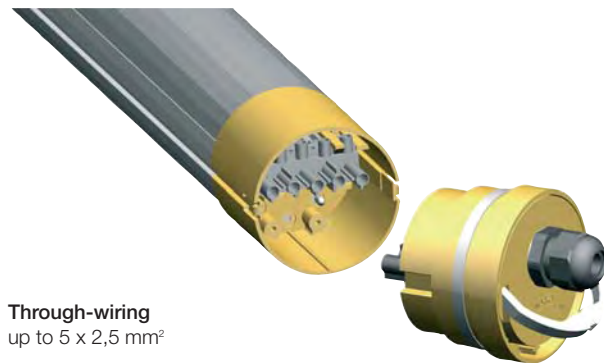



**Wire rope suspension**  
for 1m suspension



**Through-wiring**  
up to 5 x 2,5 mm<sup>2</sup>


# Tubular luminaire Ø 75 mm ZUG

NORKA

IP 68, 20 m       resistant to pressurised water for T8 and T5 lamps

applied available on request


Designed profiling of tubular luminaires, for continuous row application, with matching tubular connectors.

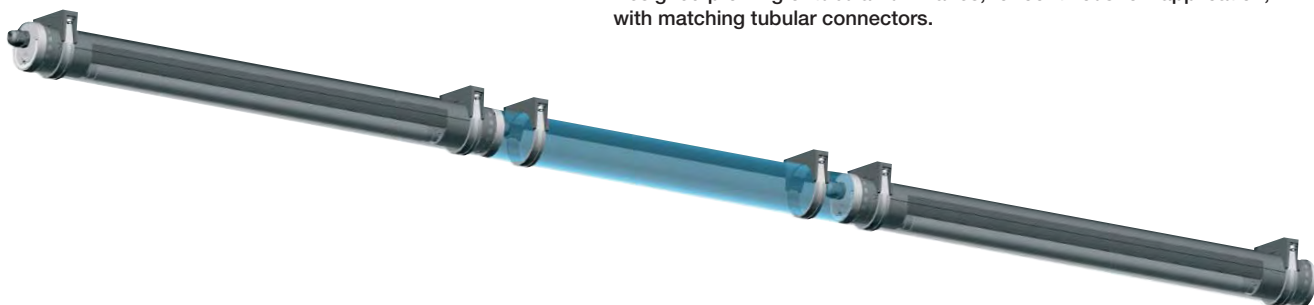

Mounting clamps  
(standard with luminaire)



Mounting clamps  
transparent (additional charge)

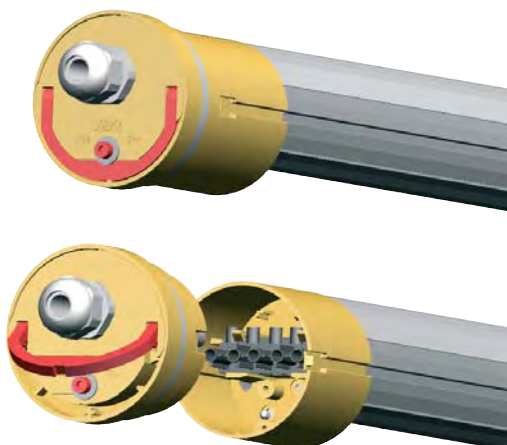

Quick locking closure

