

NORKA Tubular luminaire Ø 90 mm ZÜRICH single and twin lamp

IP 66  CE protection class I

available on request



Tubular luminaire ZÜRICH


Housing: tube Ø 90 mm made of PC clear (fracture-proof), PMMA clear, PMMA transopal or silicate glass, with integrated aluminium chassis.

Electronics: electronic ballast (HF) or low loss ballast and starter, for T5 single lamps up to 80 W and T5 twin lamps up to 54 W. For T8 single and twin lamps up to 58 W and single compact fluorescent lamps TC-L 36 W and 55 W.

Mounting: 2 stainless steel mounting clamps

Lamps

T8  Ø 26 mm

T5  Ø 16 mm

TC-L 

Version/Wattage	Lamp	L mm	a mm	Weight approx. kg	Order no.
ZÜRICH, single lamp, PMMA transopal					
1 x 18	T8 ind.	746	660	2,1	756 21
	T8 comp.	746	660	2,2	756 22
	T8 HF	746	660	2,0	756 27
1 x 36	T8 ind.	1356	1270	2,6	756 41
	T8 comp.	1356	1270	2,7	756 42
	T8 HF	1356	1270	2,4	756 47
1 x 58	T8 ind.	1656	1570	4,5	756 61
	T8 comp.	1656	1570	4,6	756 62
	T8 HF	1656	1570	3,6	756 67
1 x 36	TC-L HF	585	490	1,5	756 17
1 x 55	TC-L HF	705	610	1,7	756 37
1 x 39	T5 HF	1056	970	2,3	756 57
1 x 49	T5 HF	1656	1570	3,6	756 97
1 x 54	T5 HF	1356	1270	2,4	756 77
1 x 80	T5 HF	1656	1570	3,6	756 87
ZÜRICH, twin lamp, PMMA transopal					
2 x 18	T8 ind.	746	660	2,4	753 21
	T8 comp.	746	660	2,5	753 22
	T8 HF	746	660	2,3	753 27
2 x 36	T8 ind.	1356	1270	3,3	753 41
	T8 comp.	1356	1270	3,4	753 42
	T8 HF	1356	1270	3,0	753 47
2 x 58	T8 ind.	1656	1570	5,9	753 61
	T8 comp.	1656	1570	6,0	753 62
	T8 HF	1656	1570	3,9	753 67
2 x 39	T5 HF	1056	970	2,6	753 57
2 x 49	T5 HF	1656	1570	3,9	753 97
2 x 54	T5 HF	1356	1270	2,7	753 77



Advantages PMMA transopal:

- acid- and alkali resistant
- fuel- and impact resistant
- UV-stability
- anti glare without loss of light
- design focused application


Favourable applications:

- canopies
- food industry
- work pits
- wall washing building fascias
- decorative outdoor areas

Accessories see page 25

NEW items are marked yellow

Special version ZÜRICH for decorative illumination, with three fluorescent lamps, RGB system, dimm- and controllable.

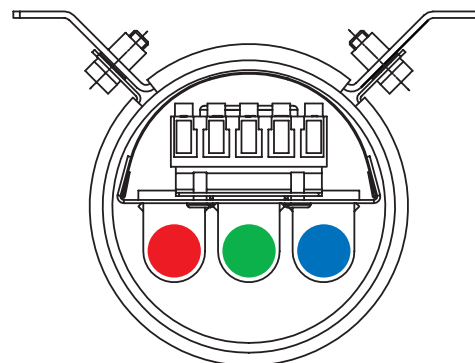


Tubular luminaire Ø 90 mm ZÜRICH single and twin lamp NORKA


IP 66  CE protection class I

available on request

Wall- and ceiling mounting

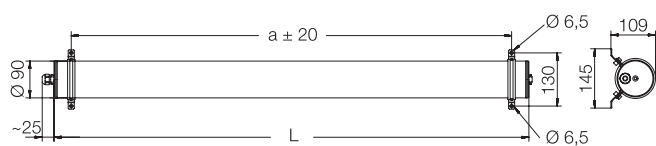

Wire rope suspension

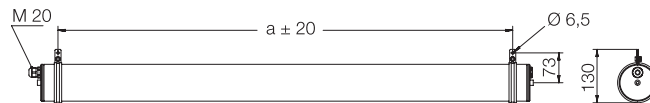

Dimensions in mm ± 2 mm

Version/Wattage	Lamp	L mm	a mm	Weight approx. kg	Order no.
ZÜRICH, single lamp, PMMA clear					
1 x 18	T8 ind.	746	660	2,1	758 21
	T8 comp.	746	660	2,2	758 22
	T8 HF	746	660	2,0	758 27
1 x 36	T8 ind.	1356	1270	2,6	758 41
	T8 comp.	1356	1270	2,7	758 42
	T8 HF	1356	1270	2,4	758 47
1 x 58	T8 ind.	1656	1570	4,5	758 61
	T8 comp.	1656	1570	4,6	758 62
	T8 HF	1656	1570	3,6	758 67
1 x 36	TC-L HF	585	490	1,5	758 17
1 x 55	TC-L HF	705	610	1,7	758 37
1 x 39	T5 HF	1056	970	2,3	758 57
1 x 49	T5 HF	1656	1570	3,6	758 97
1 x 54	T5 HF	1356	1270	2,4	758 77
1 x 80	T5 HF	1656	1570	3,6	758 87
ZÜRICH, twin lamp, PMMA clear					
2 x 18	T8 ind.	746	660	2,4	759 21
	T8 comp.	746	660	2,5	759 22
	T8 HF	746	660	2,3	759 27
2 x 36	T8 ind.	1356	1270	3,3	759 41
	T8 comp.	1356	1270	3,4	759 42
	T8 HF	1356	1270	3,0	759 47
2 x 58	T8 ind.	1656	1570	5,9	759 61
	T8 comp.	1656	1570	6,0	759 62
	T8 HF	1656	1570	3,9	759 67
2 x 39	T5 HF	1056	970	2,6	759 57
2 x 49	T5 HF	1656	1570	3,9	759 97
2 x 54	T5 HF	1356	1270	2,7	759 77

Accessories see page 25




Advantages PMMA clear:

- acid- and alkali resistant
- fuel resistant
- UV-stability

Favourable applications:

- fuel stations
- car wash
- work pits
- industrial plants
- canopies

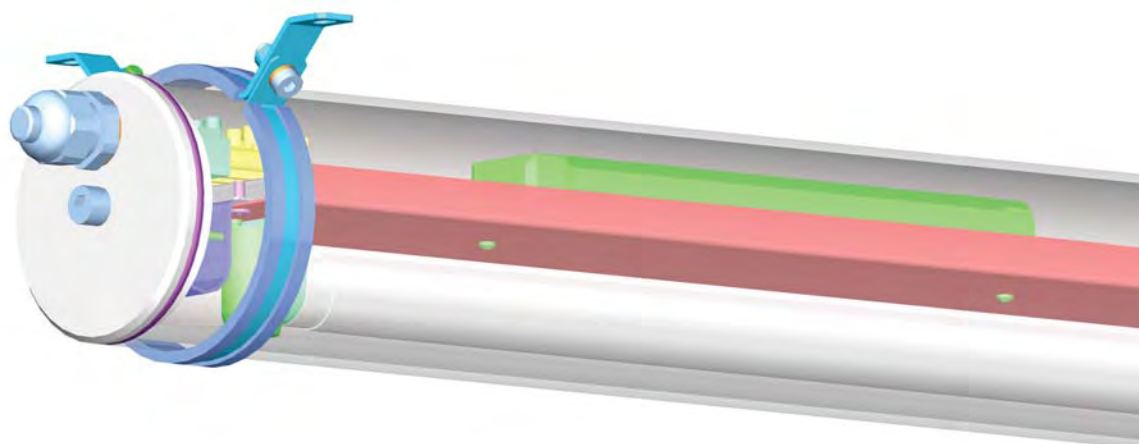

NORKA Tubular luminaire Ø 90 mm ZÜRICH single and twin lamp

IP 66   protection class I

available on request

Version/Wattage	Lamp		L mm	a mm	Weight approx. kg	Order no.
ZÜRICH, single lamp, PC clear (fracture proof)						
1 x 18	T8	ind.	746	660	2,2	755 21
	T8	comp.	746	660	2,3	755 22
	T8	HF	746	660	2,1	755 27
1 x 36	T8	ind.	1356	1270	2,7	755 41
	T8	comp.	1356	1270	2,8	755 42
	T8	HF	1356	1270	2,8	755 47
1 x 58	T8	ind.	1656	1570	4,6	755 61
	T8	comp.	1656	1570	4,7	755 62
	T8	HF	1656	1570	3,7	755 67
1 x 36	TC-L	HF	585	490	1,6	755 17
1 x 55	TC-L	HF	705	610	1,8	755 37
1 x 39	T5	HF	1056	970	2,4	755 57
1 x 49	T5	HF	1656	1570	3,7	755 97
1 x 54	T5	HF	1356	1270	2,5	755 77
1 x 80	T5	HF	1656	1570	3,7	755 87
ZÜRICH, twin lamp, PC clear (fracture proof)						
2 x 18	T8	ind.	746	660	2,5	752 21
	T8	comp.	746	660	2,6	752 22
	T8	HF	746	660	2,4	752 27
2 x 36	T8	ind.	1356	1270	3,4	752 41
	T8	comp.	1356	1270	3,5	752 42
	T8	HF	1356	1270	3,1	752 47
2 x 58	T8	ind.	1656	1570	6,0	752 61
	T8	comp.	1656	1570	6,1	752 62
	T8	HF	1656	1570	4,0	752 67
2 x 39	T5	HF	1056	970	2,7	752 57
2 x 49	T5	HF	1656	1570	4,0	752 97
2 x 54	T5	HF	1356	1270	2,8	752 77

Accessories see page 25

NEW items are marked yellow



Advantages PC clear:

- impact resistant
- fracture proof
- flame resistant
- self extinguishing

Favourable applications:

- garages
- pathways
- tunnels
- green houses
- shopping areas



Tubular luminaire Ø 90 mm ZÜRICH single and twin lamp NORKA

IP 66  CE protection class I

available on request

Version/Wattage	Lamp	L mm	a mm	Weight approx. kg	Order no.
ZÜRICH, single lamp, silicate glass					
1 x 36	T8 ind.	1356	1270	3,4	757 41
	T8 comp.	1356	1270	3,5	757 42
	T8 HF	1356	1270	3,2	757 47
1 x 58	T8 ind.	1656	1570	5,4	757 61
	T8 comp.	1656	1570	5,5	757 62
	T8 HF	1656	1570	4,5	757 67
1 x 49	T5 HF	1656	1570	4,5	757 97
1 x 54	T5 HF	1356	1270	3,2	757 77
1 x 80	T5 HF	1656	1570	4,5	757 87

ZÜRICH, twin lamp, silicate glass					
2 x 36	T8 ind.	1356	1270	4,1	754 41
	T8 comp.	1356	1270	4,2	754 42
	T8 HF	1356	1270	3,8	754 47
2 x 58	T8 ind.	1656	1570	6,8	754 61
	T8 comp.	1656	1570	6,9	754 62
	T8 HF	1656	1570	4,8	754 67
2 x 49	T5 HF	1656	1570	4,8	754 97
2 x 54	T5 HF	1356	1270	3,5	754 77

Accessories

Through-wiring	
- 3 x 1,5 mm ² (luminaire length +25 mm)	755 81.

Film with printed louvre, tube length max.	
- 1056 mm	755 104
- 1356 mm	755 105
- 1656 mm	755 106

Spare parts	
Mounting clamp stainless steel	
- for wall- and ceiling mounting	755 218
- for wire rope suspension	755 219



Advantages silicate glass:

- acid- and alkali resistant
- fuel resistant
- lubricant resistant
- ammonia resistant

Favourable applications:

- laboratories
- agriculture
- chemical industry



Stainless steel clamp for wall- and ceiling mounting included



Stainless steel clamp for wire rope suspension

